


PM-622 SUBE T.H.

CALCIUM HARDNESS BALANCER

PM-622 SUBE T.H.: Product adapted for fresh water that prevents corrosion from damaging equipment.

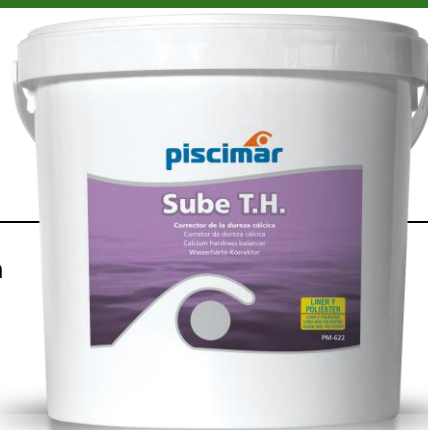

METHOD OF USE AND DOSAGE

- Measure the calcium hardness of the water with a Test-Kit.
- If the calcium hardness levels are lower than 150 ppm, add 15 g/m³ of PM-622 SUBE T.H. for each 10ppm that needs to be increased.
- Make sure the product has been previously dissolved in a water bucket before adding the product. Then, spread the mixture in the pool.
- Keep the filtration on for at least an hour.

PHYSICAL PROPERTIES

- Appearance: white solid flakes
- Odour: odourless
- pH: 7 - 11 (10% solution)
- Relative density: 2.15
- Melting/freezing point: 782 °C
- Initial boiling point and boiling range: > 1600°C
- Water solubility: 745 g/L

HAZARDS AND PRECAUTIONARY STATEMENTS

- Causes serious eye damage
- Keep out of the reach of children
- Wash your hands and your face thoroughly after handling.
- Wear suitable protective clothing, gloves and eye/face protection.
- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Remove contact lenses, if present and easy to do. Continue rinsing.
- Call a POISON CENTER or doctor/physician if you feel unwell.

PACKAGING

Packed in 4 and 25 Kg